


Specifications:

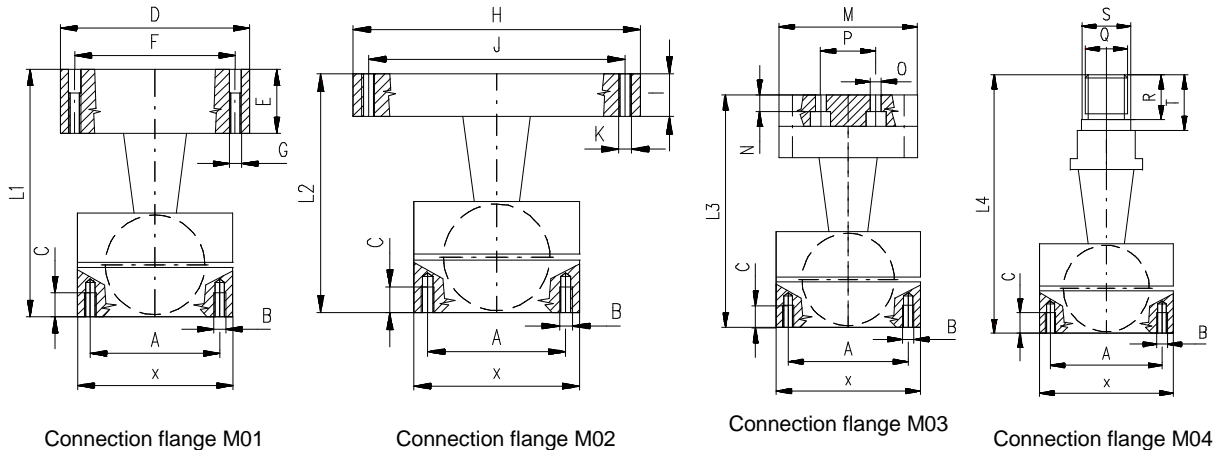

Type	Unit	JB 10/25	JB 40/63	JB 100	JB 160	JB 250	JB 400
General Dimensions							
A	mm	65	100	120	140	180	230
B	mm	8xM6	8xM6	8xM10	8xM10	8xM16	8xM20
C	mm	12	12	20	20	32	40
X	mm	78	120	150	175	220	270
Connection flange M01 – Example for Load Cells							
D	Mm	95	101	150	150	220	270
E	Mm	32	32	55	60	100	120
F	Mm	80	86	130	130	194	235
G	Mm	8xM6	8xM6	8xM10	8xM10	8xM16	8xM20
L1	Mm	124	154	227	257	335	425
Mass app.	Kg	4	10	24	35	82	155
Connection flange M02 Example for Actuators foot flange Series AH, AS, AG, PL							
H	mm	130	140	215	215	285	330
I	mm	35	40	50	50	60	70
J	mm	110	120	180	180	245	290
K	mm	8xM8	6xM10	12xM10	12xM10	12xM16	12xM16
L2	mm	127	162	222	247	295	375
Mass app.	kg	6	13	30	41	81	148
Connection flange M03 – Piston rod, Series AH, AS, AG, PL							
M	mm	80	80	130	130	185	195
N	mm	22	22	28	28	30	35
O	mm	7	7	11	11	17	22
P	mm	30	30	45	45	71	95
L3	mm	152	182	252	277	335	425
Mass app.	kg	5	10	24	35	72	130
Connection flange M04– Piston rod, Series AS, PL up to 63 kN							
Q	mm	M24	M24	-	-	-	-
R	mm	31	35	-	-	-	-
S	mm	35	35	-	-	-	-
T	mm	34	38	-	-	-	-
L4	mm	126	168	-	-	-	-

subject to change without notice